

# PFM800

## Passive HDCVI Balun




## Specifications

<b>Model</b>	<b>PFM800</b>
<b>Properties</b>	
Transmission Signal	1 channel
Transmission Distance	720P: 400M (max) 1080P: 250M (max)
Category Type	UTP CAT 5E/6 (R<10Ω /100M)
<b>Video Transmission Properties And Port</b>	
Coaxial Video Connector	BNC-M
Twisted-pair Video Connector	Push-terminal
Compatible Format	HDCVI
Resolution	720P/1080P
Anti-interference	>60db
<b>Protection</b>	
ESD	1a contact discharge electricity level 3
	1b air discharge electricity level 3
	Per: IEC61000-4-2
Coaxial Cable Connector	2KV(common-code) Per: IEC1000-4-5
UTP Cable Connector	2KV(different-code), 4KV(common-code), Per: IEC1000-4-5
<b>Impedance</b>	
BNC Male	75 ohms
UTP Cable	100 ohms
<b>Physical Properties</b>	
Dimension(L*W*H)	53mm*20mm*17mm

# PFM800

Shell	ABS
Color	Black
N.W.	25G
<b>Stability</b>	
MTBF	>10000H
<b>Environmental</b>	
Operating Temperature	-10~55°C
Storage Temperature	-20~70°C
Humidity	0~95%(non-condensing)

## Dimensions (mm)

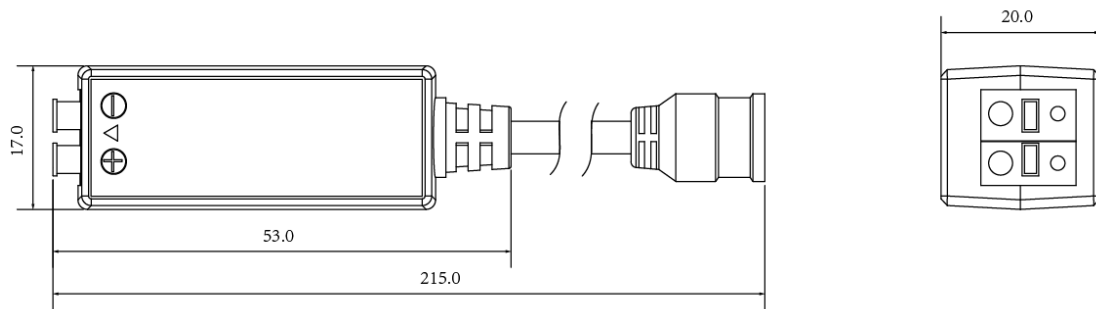

## Application

